

1010 East Main Street, League City, TX 77573 Phone:281.334.0766 Fax: 281.334.4255 www.stiweb.com / www.stiwebstore.com

CMCP422ATS-M12 Series Loop Powered 4-20mA Acceleration Sensor, Side Exit M12 Connector



Features:

- Loop Powered 4-20mA Output
- Acceleration RMS or Peak
- Side Exit 4 Pin M12 Eurofast Connector
- Interfaces Directly to PLC/DCS System
- Two Different Ranges Available
- 10Hz to 1kHz ISO Filtering (600 CPM to 300k CPM)
- -13 to 194°F (-25 to 90°C) Temperature Range
- Sealed to IP68

Typical Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

> -05 Model: 0-5 g's RMS or Peak -10 Model: 0-10 g's RMS or Peak

Base Isolated with Faraday Cage

10 kHz Min.

ISO 10816

Less than 5%

15 to 30 VDC

10 Hz to 5 kHz \pm 5% 600 CPM to 300k CPM

Technical Performance

Mounted Base Resonance: Ranges:

Frequency Response:

Isolation: Transverse Sensitivity:

Electrical

Condition Monitoring Custom Products

Output Current: Supply Voltage: Settling Time: Output Impedance: Case Isolation:

2 Seconds Loop Resistance 600 Ohms Max @ 24VDC >10⁸ Ohms at 500 Volts

4-20mA DC Proportional to RMS or Peak Acceleration (g)

Environmental

Operating Temperature Range: Sealing: Maximum Shock:

-13 to 194°F (25 to 90°C) IP68 5000 g


Mechanical

Case Material: Sensing Element: Mounting Torque: Weight: Mounting: Mating Connector:


Stainless Steel PZT/Compression Type 5.9 ft. lbs (8Nm) 6.5 Oz (185g) 1/4"-28 Captive Bolt (Supplied with Sensor) 4 Pin M12 Cordset




Dimensions

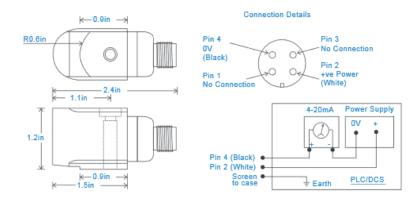

Typical Frequency Response

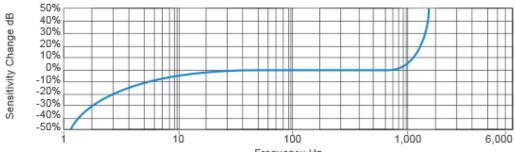

Frequency Hz



-XXX Description 5 g's Full Scale 10 g's Full Scale RMS Detection Peak Detection -C 2 Pin MS 5015 Connector -M12 Hurofast Connecto

-M12 M12 Eurofast Connector -I Integral Braided Armor Cable (5 meters)

Similar Products:



CMCP422ATS-XX-X-I Integral Armored Cable



CMCP422ATS-XX-X-C 2 Pin MS 5015 Connector