


CMCP265 Series NEMA 4 and 4X Termination Enclosures

CMCP265 Termination Enclosures are offered in NEMA 4 and NEMA 4X. Screw Clamp DIN Rail Mounted terminals (3 per channel) are provided for the intermediate termination of Accelerometers, Proximity Probes, Speed Sensors, RTD's, and other transducers.

The **CMCP265FG** NEMA 4X enclosures are made of molded fiberglass polyester and are easily punched or drilled. They have outstanding physical properties including chemical and temperature resistance. A seamless foam in-place gasket assures a watertight and dust tight seal. Screw covers are secured with captivated Monel cover screws.

The **CMCP265PS** NEMA 4 enclosures are constructed of 14 gauge mild steel and are ANSI 61 gray polyester powder coated on the all surfaces.

The **CMCP265SS** NEMA 4X enclosures are constructed from 14 gauge 304 Stainless Steel. These enclosures will better resist corrosive environments than the CMCP265PS. CMCP265SS junction boxes feature continuously welded seams which are ground smooth with no holes or knockouts. An oil-resistant, in-place gasket ensures a watertight and dust tight seal. Stainless Steel screws and clamps are included.

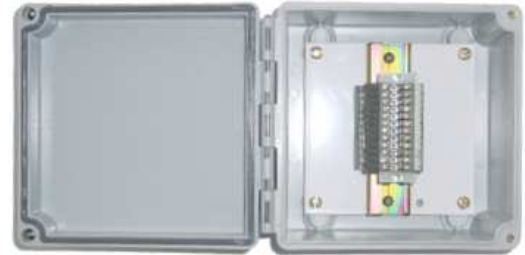

-XX	Enclosure Dimensions:
06	6.0" H x 6.0" W x 4.0" D (15.24 x 15.24 x 10.16 cm)
12	6.0" H x 6.0" W x 4.0" D (15.2 x 15.2 x 10.2 cm)
24	8.0" H x 6.0" W x 4.0" D (20.3 x 15.2 x 10.2 cm)
36	10.0" H x 8.0" W x 6.0" D (25.4 x 20.3 x 15.2 cm)
48	14.0" H x 12.0" W x 8.0" D (35.6 x 30.5 x 20.3 cm)

CMCP265FG	-XX	Fiberglass NEMA 4X
	02	2 Channel, 6 Terminals
	04	4 Channel, 12 Terminals
	08	8 Channel, 24 Terminals
	12	12 Channel, 36 Terminals
	16	16 Channel, 48 Terminals

CMCP265PS	-XX	Powder Coated Steel NEMA 4
	02	2 Channel, 6 Terminals
	04	4 Channel, 12 Terminals
	08	8 Channel, 24 Terminals
	12	12 Channel, 36 Terminals
	16	16 Channel, 48 Terminals

CMCP265SS	-XX	304 Stainless Steel NEMA 4X
	02	2 Channel
	04	4 Channel, 12 Terminals
	08	8 Channel, 24 Terminals
	12	12 Channel, 36 Terminals
	16	16 Channel, 48 Terminals